

2023 - 2024
CATALOGUE



BUILDING & CONSTRUCTION

WWW.CHEMTOOLS.COM.AU



CONTENTS

CATEGORIES	PAGE	FEATURED PRODUCTS BY BRAND	PAGE
Caulking Guns	7	ETCH Etch Primer, Grey & Black	14
Concrete & Formwork	8 - 9	NPR Coloured Galvanising Paint (Assorted Colours)	13
Construction Adhesives	5	SG Silver Galvanising Paint, 3-in-1	13
Dispensing Guns	7	ZPH Oxide Metal Primer, Red & Grey	14
Dispensing Nozzles	6	GROUND ZERO	
Epoxies	4 - 5	Glass & Surface Cleaner, Anti-Static	15
Hand Cleaners	14	KLEANITIZE	
Hybrid Sealants	6	Hand Cleaner, Heavy Duty, Citra-Grit & Mint-Grit	14
Lubricants	10 - 11	LANOFLEX™	
Manual Spraying	7	R50 Lanolin, General Purpose	11
Mixing Nozzles	4	R55 Lanolin, Heavy Duty (Marine Grade)	11
MMA/Structural Adhesives	3	LIQUID CHISEL	
Paints & Coatings	12 - 14	LC101 Concrete & Mortar Remover	8
Polyurethane Structural Adhesives	4	LC201 Formwork Release Agent, Lanolin-Based	8
Sprayable Adhesive	6	LC301 Formwork Release Agent, General Purpose	9
Surface Cleaners	15	LC401 Red Dust Remover	9
		LC501 Formwork Release Agent, Water-Based	9
		RAPIDSTICK™	
		8-103Z Polyurethane Adhesive (Plastic & Wood Bonding)	4
		8-152Z Polyurethane Adhesive (Plastic Assembly & Repair)	4
		8-145 Epoxy Putty	5
		8-150 Epoxy, Ultra Clear (5 Minute)	4
		8-250 Epoxy, Ultra Clear (15 Minute)	4
		8-300 MMA/Structural Adhesive (Metals & Plastics)	3
		8-310 MMA/Structural Adhesive (Difficult to Bond Plastics)	3
		8-420 MMA/Structural Adhesive (All Substrates)	3
		Adhesive Spray, Multi-Surface	6
		PITBULL 101 Fast Grab Hybrid Sealant	6
		PITBULL 201 Dura-Flex Hybrid Sealant	6
		RS-50 Liquid-Fix Construction Adhesive	5
		RS-60 All-In-One Silicone Sealant	5
		TAP-N-COOL	
		Straight Cutting Fluid	11
		SPOT-IT	
		Spot Marking Paint (Assorted Colours)	12

FEATURED PRODUCTS BY BRAND	PAGE
CHEMTOLS®	
Dispensing Gun (50ml, 1:1 & 2:1)	7
Dispensing Gun (50ml, 10:1)	7
Dispensing Gun (400ml, 1:1 & 2:1)	7
Dispensing Gun (490ml, 10:1)	7
Dispensing Nozzles (M15, M21 & Sausages)	6
Industrial Cleaner & Degreaser	15
Industrial Cleaner & Degreaser - Concentrate	15
Static Mixing Nozzle, 1:1, Bayonet (25ml & 50ml)	4
Static Mixing Nozzle, 1:1, F System (400ml)	4
Viton® Seal Sprayer, Heavy Duty, 1L Capacity	7
- Viton® Seal Replacement Kit	7
DEOX	
R1™ Multi-Purpose Lubricant	10
- R1™ Spray Bottle, Empty, 500ml Capacity	10
R14 Silicone Paste, Universal	11
R22 'Citrashift' Industrial Cleaner & Degreaser	15
R44 Solvent-Free Lubricant	10
- R44 Spray Bottle, Empty, 500ml Capacity	10
R56 Super Lubricant	10
- R56 Spray Bottle, Empty, 500ml Capacity	10
R60 Silicone Spray, Heavy Duty	10
GALMAX™	
90 Cold Galvanising Paint (Brushable & Sprayable)	13



MMA/STRUCTURAL ADHESIVES

Methyl Methacrylate (MMA) adhesives, also known as acrylics or 'structural adhesives', are a type of two-component adhesive system widely used for bonding various materials. They consist of a base resin (methyl methacrylate monomer) and a catalyst (peroxide), which react together to form a strong and durable bond.

MMA/Structural Adhesives offer several advantages, including fast curing times, high bond strength, excellent impact resistance, and good chemical resistance. They are known for their ability to bond a wide range of materials, including metals, plastics, composites, glass, ceramics, and wood.

MMA are commonly used in industries such as Automotive, Construction, Aerospace, Marine, Electronics, and general manufacturing. They are suitable for structural bonding applications where high strength is required, as well as for general-purpose bonding.

MMA are tough, versatile adhesives which can bond dissimilar materials - even with different coefficients of thermal expansion.

The Rapidstick™ MMA/Structural Adhesive range is guaranteed to outperform most other types of adhesives or anchoring technologies. Find more online at: www.chemtools.com.au

NO SLUMP • NO MESS • SET & FORGET FOR A LIFETIME BOND

RAPIDSTICK™ 8-300 METALS & PLASTICS

RAPIDSTICK™ 8-310 DIFFICULT TO BOND PLASTICS



100% reactive with excellent impact, peel, and shear resistance. Strong adhesion to both porous and non-porous surfaces, whether smooth, rough, or irregular.

Ideal for bonding dissimilar materials with high differential flexibilities, such as rigid metal to flexible plastic. No primer or chemical wipes required.

Can be used across a wide variety of metals, thermoplastics, thermosets, and composite assemblies. Typically used for furniture, plastic/metal fabrications, signage, automotive components, and more.

SUPER STRONG!		OPEN TIME	FIXTURE TIME
	FAST SET	4 - 6 MINS	12 - 15 MINS
	VISCOSITY	90,000 - 100,000 CPS THIX	
	GAP FILL	UP TO 9.5mm	
	TEMP	-40°C MIN MAX +121°C	

PART NO.	SIZE
8-300-25	25ml Dual Syringe
8-300-50	50ml Dual Cartridge
8-300-400	400ml Dual Cartridge

SUPER STRONG!		OPEN TIME	FIXTURE TIME
	MEDIUM SET	12 - 18 MINS	30 - 35 MINS
	VISCOSITY	90,000 - 100,000 CPS THIX	
	GAP FILL	UP TO 9.5mm	
	TEMP	-40°C MIN MAX +121°C	

PART NO.	SIZE
8-310-25	25ml Dual Syringe
8-310-50	50ml Dual Cartridge
8-310-400	400ml Dual Cartridge

RAPIDSTICK™ 8-420 • ALL SUBSTRATES (INCL. METAL, PLASTIC, GRANITE & WOOD)

✓ INNOVATIVE
NEW-GEN BLEND
OF LOW ODOUR
MONOMERS

Non-Flammable
Formula



Versatile and convenient. 100% reactive. Low shrinkage, high elongation formula.

Bonds an expansive array of metals, thermoplastics, thermosets, and composite assemblies.

Provides an extremely strong, flexible bond with no surface primer or conditioner required.

Excellent peel and shear resistance, high fatigue endurance, and high impact strength. Retains its bond at both low and elevated temperatures.

Non-sagging thixotropic formulation ensures quick bonding from multiple angles. 80% ultimate strength is achieved in as little as 18 minutes.

Commonly used to bond:

- ✓ Locators to ACM without read-through or witness marks
- ✓ Mild steel frames to FRP, assuring high vibration and impact resistance
- ✓ Fasteners to GRP and FRP moulded parts
- ✓ Composite and metal fabrications for seating

SUPER STRONG!		OPEN TIME	FIXTURE TIME
	FAST SET	3 - 4 MINS	7 - 10 MINS
	VISCOSITY	250,000 - 300,000 CPS THIX	
	GAP FILL	UP TO 3mm	
	TEMP	-55°C MIN MAX +120°C	

PART NO.	SIZE	MIX RATIO
8-420-50	50ml Dual Cartridge	10 : 1
8-420-490	490ml Dual Cartridge	10 : 1

POLYURETHANE STRUCTURAL ADHESIVES



RAPIDSTICK™ 8-103Z PLASTIC & WOOD BONDING

Provides a high level of adhesion with maximum reliability and excellent environmental resistance to harsh conditions.

Cures at room temperature due to air-borne moisture, with the curing process the result of exothermic reactions between the two components.

Offers good abrasion, impact, and chemical resistance
Sandable after cure.

STRONG ADHESION TO MANY SURFACES, INCLUDING:

- ✓ Aluminium
- ✓ Polyurethane
- ✓ PVC
- ✓ Thermoplastics/Thermosetting Plastics
- ✓ Stainless steel
- ✓ Concrete
- ✓ Composites
- ✓ Glass
- ✓ ABS
- ✓ Wood



RAPIDSTICK™ 8-152Z PLASTIC ASSEMBLY & REPAIR

SUPER STRONG!		OPEN TIME	15 - 20 MINS	FIXTURE TIME	55 - 60 MINS
	VISCOSITY	HIGH VISCOSITY PASTE			
	GAP FILL	UP TO 5.5mm			
	TEMP	-40°C MIN MAX +120°C			

PART NO.	SIZE	MIX RATIO
8-103Z-50	50ml Dual Cartridge	1:1
8-103Z-400	400ml Dual Cartridge	1:1

Rapidstick™ Polyurethane Adhesives perform better under harsh conditions when compared to the substrates bonded*

An increase in lap shear strength of an average of 50 psi following a 30 day environmental cycle has been found to occur when compared to initial testing data

Testing Temperature: 25°C

Initial Testing Data: 2,225 psi ▪ @30 Days: 2,275 psi

**in particular, plastics tend to fail before the bond*

SUPER STRONG!		OPEN TIME	4 - 6 MINS	FIXTURE TIME	25 - 30 MINS
	VISCOSITY	HIGH VISCOSITY PASTE			
	GAP FILL	UP TO 5.5mm			
	TEMP	-40°C MIN MAX +120°C			

PART NO.	SIZE	MIX RATIO
8-152Z-50	50ml Dual Cartridge	1:1
8-152Z-400	400ml Dual Cartridge	1:1

EPOXIES

RAPIDSTICK™ 8-150 & 8-250 EPOXY

Flexible, super high strength bond. Tough, rigid, and non-shrinking.

Resistant to water and most common solvents.

Dries ultra clear - perfect for transparent repairs or invisible seams.

Versatile: use on a wide range of materials as a gap filler, or for surface repairs and laminating.

Combine with fibreglass cloth for a durable patch.

Tint with earth pigments, cement, or sand for colour matching.

Can be rubbed back and drilled after drying.

COLOUR	DRIES CLEAR
STRENGTH	HIGH UP TO 3426 PSI
TEMP	-23°C MIN MAX +150°C

- ✓ Metal
- ✓ Glass
- ✓ Wood
- ✓ Tile
- ✓ Ceramics
- ✓ China
- ✓ Rigid Plastics
- ✓ Fibreglass
- ✓ Stone
- ✓ Concrete

PART NO.	GEL TIME	SIZE
8-150-25	Approx. 5 minutes	25ml Dual Syringe
8-250-25	Approx. 15 minutes	25ml Dual Syringe



MIXING NOZZLES

HELICAL STATIC MIXING NOZZLES

Continually divides and recombines both adhesive parts (A + B) for optimal blending.


Alternating left and right core elements provide consistent, high quality mixing.

A VIEW FROM THE UNDERSIDE



- ✓ Sturdy body with alternating heavy duty polypropylene mixing elements
- ✓ Consistent, high quality mixing of both components
- ✓ Tapered and stepped head may be cut to required size


Available in a pack of 10 (not sold separately)

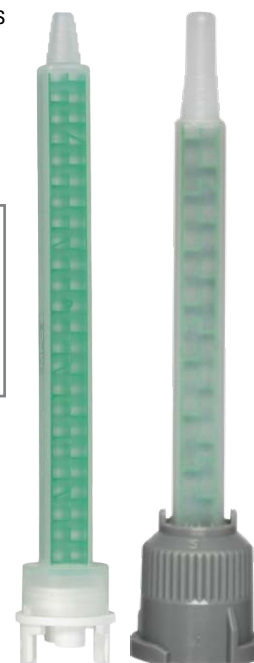

NOZZLES SHOWN ARE NOT TO SCALE

PART NO.	TYPE	ELEMENTS	CARTRIDGE
8-MXN-400F-10PK	F System	Quadro - 24	1:1 400ml
8-MXN-TL-25-10PK	Bayonet	Quadro - 16	1:1 25ml & 50ml

EPOXIES

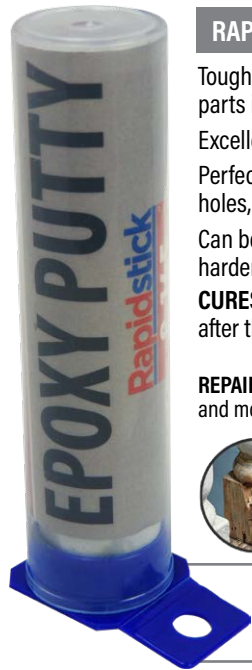

RAPIDSTICK™ 8-145 KNEADABLE EPOXY PUTTY CUT - MIX - SHAPE - APPLY

Tough and impact resistant. High bond strength. Consists of two parts in a 1:1 mix ratio. Apply by hand or trowel.

Excellent adhesion to most surfaces, wet or dry.

Perfect for reshaping damaged parts. Permanently repairs cracks, holes, dents, and leaks. Mounts signs to walls for long-term display.

Can be sanded, drilled, tapped, machined, filed, and painted after hardening.

CURES AT ROOM TEMP: Remains soft and pliable for 4 - 5 mins after thorough mixing. **Cures hard as metal** within 15 to 20 mins.

REPAIRS chips, cracks, dents, splits, breaks, and most surface or structural blemishes



SEALS leaks in pipes, tanks, and filters quickly and easily




Left: Un-combined putty stick showing the Resin (outer layer) and Hardener as it arrives in the tube. **Right:** Kneaded putty turns a uniform pale grey colour when fully combined.



FILLS unwanted spaces, holes, and gaps - and seals air flow

BONDS to wet and dry surfaces, permanently fixing in place



Mixed Viscosity:	1.90 @ 25°C	Shore D Hardness:	75 - 78	Compression Strength:	81 MPa
Flash Point:	>80°C	Tensile Shear Strength:	6.1 MPa	Thermal Conductivity:	0.1 W/mK
Full Cure:	12 hours	Temp Resistance:	110°C	Dielectric Strength:	11 kV/mm

COMING SOON
Rapidstick™ Pipe Repair Bandage
WITH STEEL PUTTY

CONSTRUCTION ADHESIVES

RAPIDSTICK™ RS-60 ALL-IN-ONE SILICONE SEALANT



Single component neutral curing low odour formula.

Ideal for expansion joints exposed to the outside elements.

Forms a permanent and durable elastomeric seal. Waterproof and unbeatably tough after cure.

Non-tacky, non-slumping, and highly adhesive.

Will not degrade or lose flexibility over time.

Apply to un-primed or painted surfaces with no reduction in performance.

Resistant to UV damage, fading, abrasion, cracking, and shrinking. Mould and mildew resistant.

Suitable for use in harsh environments or under extreme temperature conditions.

COMPATIBILITY

- Primed & un-primed surfaces
- Electronic PCBs & components
- Electrical devices
- Expansion joints
- Timber & wood
- Concrete & bricks
- Most plastics
- All metals, incl. soft & coated
- Glass
- Laminates
- Drywall & plaster
- Granite, marble, porcelain & stone
- Ceramics

SM	NEW! Colorbond® Surfmist	SV	CL	BK	WT	GY
----	--------------------------------	----	----	----	----	----

PART NO.	COLOUR	SIZE
8-RS60CL-300	Clear	300ml Cartridge
8-RS60WT-300	White	300ml Cartridge
8-RS60BK-300	Black	300ml Cartridge
8-RS60GY-300	Grey	300ml Cartridge
8-RS60SV-300	Silver	300ml Cartridge
8-RS60SM-300	Colorbond® Surfmist	300ml Cartridge

RAPIDSTICK™ RS-50 LIQUID-FIX CONSTRUCTION ADHESIVE



NEW!

Versatile, high quality, and 'strong-as-nails'.

Suitable for high-stress construction or DIY. Exceptional bond strength, durability, and impact resistance.

For porous and non-porous materials, and indoor or outdoor applications.

Non-toxic, non-flammable, and safe. Odourless polyurethane base contains no hazardous ingredients.

Water, weather, mould, and mildew resistant. No discolouration, sagging, or weakening.

Can be polished and painted after cure.

COMPATIBILITY

- All metal types, incl. stainless steel & anodised aluminium
- Porcelain, ceramics, marble & stoneware
- Concrete, masonry & bricks
- Glass & crystal
- Plastics* & rubbers
- Building materials, incl. plasterboard, particleboard, MDF & finished wood
- Wet & dry timber
- Furniture fabrics, incl. leather & polyester

*Pre-test plastics to determine compatibility

BG

Note: Not suitable as the sole adherent in structural bonding

PART NO.	COLOUR	SIZE
8-RS50BG-300	Beige	300ml Cartridge



HYBRID SEALANTS

RAPIDSTICK™ PITBULL 201 DURA-FLEX HYBRID SEALANT

High initial grab. Durable and flexible. Completely silicone-free. Excellent adhesion to both porous and non-porous surfaces. Can be used under most environmental conditions. Outperforms most glues, acrylics, PU adhesives, and buthylene sealants.

Suitable for most delicate materials and flexible joints. Can be applied as a universal filler for cracks and uneven surfaces. Can be sanded and painted after cure for seamless repair.

Used in the maintenance and construction industries.

GY

PART NO.	COLOUR	SIZE
8-HBS201GY-600	Grey	600ml Sausage

COMMON APPLICATIONS

- Weatherproofing window & door joints
- Bonding glass in synthetic & aluminium profiles
- Mounting panels, skirting boards, thresholds, mirrors & insulation materials
- Sealing & bonding coated metal, porcelain, polyester, stainless steel, anodised aluminium & finished wood.

RAPIDSTICK™ PITBULL 101 FAST GRAB HYBRID SEALANT

Solvent-free and based on the latest polymer technology. Primerless adhesion to most substrates. Bonds to moist and dry surfaces. Excellent UV resistance. Excellent abrasion, oil, and solvent resistance. Apply under most environmental conditions.

Used in the automotive, roofing, and marine industries. Performs in excess of 20 years. Cures to a tough, elastic adhesive/sealant. Tool within 10 minutes of application, and paint after cure.

Flagged as an essential fast-grab sealant due to its long life expectancy.

BK

WT

GY

PART NO.	COLOUR	SIZE
8-HBS101BK-300	Black	300ml Cartridge
8-HBS101WT-300	White	300ml Cartridge
8-HBS101GY-300	Grey	300ml Cartridge

COMMON APPLICATIONS

- Perimeter sealing plastic, timber & metal frames
- Sealing & bonding flexible connection joints in air conditioning, ducting & ventilation installations/systems.
- Sealing expansion & construction joints

RAPIDSTICK™ PITBULL 201 & 101 OFFER ALMOST NO SURFACE LIMITATIONS*

- ✓ All metals, including soft metals
- ✓ Mirrors and glass
- ✓ Natural stone, granite, and marble
- ✓ Concrete, tiles, and bricks
- ✓ Wood, including timber, MDF, cork, and chipboard
- ✓ Plaster, laminates, and most plastics
- ✓ Polystyrene and polyurethane

*Suitable for use under most environmental conditions.

**BONDS • MOUNTS • SEALS
NAILS IT EVERY TIME**



DISPENSING NOZZLES

Compatible with adhesives and sealants such as silicone, MS polymer, acrylic, and greases.

Can be cut to the desired size with a razor.

Nozzle 1: Cap screws into place and remains airtight to prevent left over product from curing. Nozzle can be cut down by 30mm to cap thread.

Nozzles 2 & 3: Standard threaded cartridge nozzles with a universal fit for all M15 (2) and M21 (3) threads.

Nozzle 4: Fits universally on any manual or pneumatic gun barrels which take foil sausages ranging in size from 300ml and above.



REF	PART NO.	SIZE	BASE DIAM.	COMPATIBILITY
1	8-CGHN-105	M15	22mm	Cartridges - M15
2	8-CGN-105	M15	18mm	Cartridges - M15
3	8-FGN-105	M21	28mm	Cartridges - M21
4	8-SGN-WHT-110	Universal	55mm	Sausage Guns

SPRAYABLE ADHESIVE

RAPIDSTICK™ MULTI-SURFACE ADHESIVE SPRAY

Advanced and versatile rubber tack. Strong and durable bond. Non-staining formula.

For light to heavy duty applications.

Expelled as a mist from a moderate flow-rate spray valve for over-spray control.

Ideal for electrical and industrial repair, framing, crafts, and other projects.

Provides speedy bonding after a conveniently long open time. Allows for the repositioning and adjustment of surfaces.

SUITABLE FOR USE ON A WIDE RANGE OF SURFACES

- ✓ Metals*
- ✓ Cork
- ✓ Leather
- ✓ Plastics
- ✓ Wood
- ✓ Foam
- ✓ Rubber
- ✓ Vinyl
- ✓ Sponge
- ✓ Insulating materials
- ✓ All Paper Types
- ✓ Felt
- ✓ Corrugated Cardboard
- ✓ Fabrics

*Excludes structural bonding

PART NO.	SIZE
8-ADS-400	400g Aerosol



DISPENSING GUNS

50ML 2-COMPONENT CARTRIDGE DISPENSING GUNS

Durable, heavy duty housing made from high impact, light-weight plastic. Specially designed for cartridges of MMA, Acrylic Cement, Epoxy, or PU.

Twin pistons provide an even and reliable flow for consistent and precise no-mess dispensing.



PART NO.	SUITABILITY	COMPATIBILITY
DCT-DG8050-11	50ml Dual Cartridge	1:1 and 2:1
DCT-DG8050-110	50ml Dual Cartridge	10:1

400 & 490ML 2-COMPONENT CARTRIDGE DISPENSING GUNS

Industrial grade. Portable and lightweight, yet robust. Solid plastic casing with steel piston arms. Easy to load, slide in/slide out cartridge insertion system.

Ideal applicator where air supply is not available. For medium to high viscosity cartridges.



PART NO.	SUITABILITY	COMPATIBILITY
DCT-DG8490-110	490ml Cartridge	10:1
DCT-DG8400-11	400ml Cartridge	1:1 and 2:1

CAULKING GUNS

INDUSTRIAL GRADE ON/OFF DRIPLESS CAULKING GUN (300/310ML)

Heavy duty with a premium finish. Ergonomically designed aluminium handle and trigger. 360-degree rotating cradle.

Features a high density sintered thrust block and a heat treated push rod.

Smooth and precise dispensing of high viscosity materials.



Dual thrust ratios:
Dripless ON: 14:1, Dripless OFF: 19:1
Easy to reach ON/OFF switch.

PART NO.	WEIGHT	DIMENSIONS
DCT-DG8310-1	780 grams	360mm x 210mm x 60mm

PNEUMATIC SAUSAGE GUN


Fully adjustable pressure regulator. Smooth, uninterrupted flow.

Dispenses effortlessly for hassle-free application. Suits all adhesive and sealant types.

SPECIFICATIONS

Sound Level: < 70 DB Operating Pressure: 90 - 120 psi

PART NO.	WEIGHT	DIMENSIONS	SUITS
DCT-DG8300-4	900g	320 x 220mm	300/310ml
DCT-DG8600-4	1.2Kg	520 x 220mm	Up to 600ml

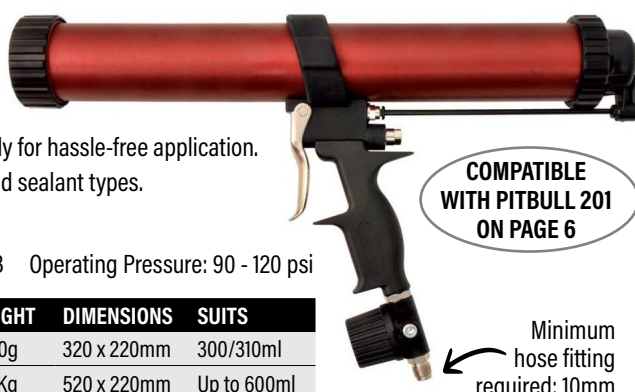

COMPATIBLE
WITH PITBULL 201
ON PAGE 6

Minimum
hose fitting
required: 10mm

MANUAL SPRAYING

HEAVY DUTY VITON® SEAL SPRAYER



Comfortably sized hand-held pressure spray.

Impact resistant HDPE body.

High quality Viton® seal*.

Designed for repetitive, heavy duty use.


Produces an even, constant mist.

Resists most harsh solvents and mineral oils containing sulphur.

*Not compatible with acetone or chemicals containing ketones. Check website for compatibility chart if in doubt.

✓ GREAT FOR
LUBRICANTS,
CLEANERS &
MOST
INDUSTRIAL
SOLVENTS
SOME
EXCEPTIONS
APPLY

NOTE: This unit comes pre-installed with one Heavy Duty Viton® Seal Kit. Replacement kits may also be purchased separately.



PART NO.	SIZE / DESCRIPTION
CT-MSPR-1L	1 Litre Capacity
CT-MSPR-S-KIT-GN	H/Duty Viton® Seal Replacement Kit

CONCRETE & FORMWORK

LIQUID CHISEL LC101 CONCRETE & MORTAR REMOVER



CONTAINS NO: ☒ HYDROFLUORIC ACID
☒ PHOSPHORIC ACID
☒ SULFURIC ACID
☒ MURIATIC ACID

Turns concrete, mortar, lime, and grout into a soft paste for effortless removal. Excellent on tools and equipment. Odourless and fast-acting*.

Easy to use: apply to the hardened, dry surface using a foaming pump sprayer.

Non-corrosive, non-flammable, and biodegradable.

Extremely safe and cost effective.

COMPATIBLE WITH MOST SURFACES, INCLUDING:

- ☒ Steel ☒ Aluminium ☒ Glass
- ☒ Fiberglass ☒ Plastic ☒ Wood
- ☒ Rubber ☒ Painted/Coated

PART NO.	SIZE
CT-LC101-750ML	750ml Trigger Spray
CT-LC101-5L	5 Litres
CT-LC101-20L	20 Litres
CT-LC101-200L	200 Litres
CT-LC101-1000L	1,000 Litres (IBC)

*The amount of time required to leave the product on is strictly proportional to the thickness of the product being dissolved.

SUGGESTED DILUTION RATIOS

LC101 : TAP WATER

New concrete/mortar/lime/grout	Full strength or up to 1 : 3
Old concrete/mortar/lime/grout, including deposits on tools and equipment	Full strength or maximum 1 : 1 dilution

RECOMMENDED FOR THE GENERAL CLEANING OF:

- TRUCKS & TRAILERS
- WHEELBARROWS
- PUMPS
- TROWELS
- SCAFFOLDS
- SAWS
- CONCRETE MIXERS
- SHOVELS
- FORMWORK
- DRILLS
- GENERATORS
- MUDBOARDS



LIQUID CHISEL LC201 FORMWORK RELEASE AGENT



Versatile, unique, and powerful non-reactive agent. Exceptional release properties. Superior rust and corrosion protection for steel molds and metal components.

Creates a non-stick barrier between formwork and fresh concrete. Facilitates an easy and clean separation for a smooth and defect-free surface.

Equally effective on timber and protects the ends to stop swelling.

Suitable for use on multiple surfaces, including pre-treated formwork, metal, wood, plastic, rubber, and fiberglass.

Protects from rust and corrosion. Will not inhibit paint adhesion.

Low to no odour. Non-staining. Low VOC emissions. Extends the service life of tools, parts, and flexible molds.

Excellent Australian manufactured, environmentally safe product.

Available in full strength, or in pre-diluted and ready to use ratios of 50/50 or 70/30.

PART NO.	SIZE	CONCENTRATION
CT-LC201-20L	20 Litres	100% Concentrate
CT-LC201-200L	200 Litres	100% Concentrate
CT-LC201D50-20L	20 Litres	RTU: 50% Dilution
CT-LC201D50-200L	200 Litres	RTU: 50% Dilution
CT-LC201D50-1000L	1,000 Litres (IBC)	RTU: 50% Dilution
CT-LC201D70-20L	20 Litres	RTU: 70% Dilution
CT-LC201D70-200L	200 Litres	RTU: 70% Dilution
CT-LC201D70-1000L	1,000 Litres (IBC)	RTU: 70% Dilution

RECOMMENDED DILUTION RATIOS FOR CONCENTRATE

LC201 : TAP WATER

Concreting	1 : 1
Scaffolding / Metal Components	2 : 1

COVERAGE RATES

RECOMMENDED FILM THICKNESS (ALL STRENGTHS): 0.6 MICRONS

Highly Porous Materials	20 - 25m ² per Litre
Semi-Porous Materials	25 - 30m ² per Litre
Non-Porous Materials	30 - 35m ² per Litre

CONCRETE & FORMWORK

LIQUID CHISEL LC301 GENERAL PURPOSE FORMWORK RELEASE AGENT

- ✓ Extends the lifespan of formwork and reduces overall project costs
- ✓ Compatible with wood, metal, and plastic forms

Facilitates the easy, effortless, and clean removal of formwork from freshly poured concrete.

Reduces friction to minimise the risk of damage to concrete and forms.

Non-staining to avoid discolouration and residual surface marks. Time-saving, quick drying formula allows for faster formwork re-usability and an increase in concreting productivity.

HIGH QUALITY SOLVENT BLEND

BRAND NEW PRODUCT



PART NO.	SIZE
CT-LC301-20L	20 Litres
CT-LC301-200L	200 Litres
CT-LC301-1000L	1,000 Litres (IBC)

LIQUID CHISEL LC501 WATER-BASED FORMWORK RELEASE AGENT

- ✓ Non-flammable and safe to use in both indoor and outdoor applications.

Reduced VOC emissions.

High performance with superior release properties.

Prevents adhesion and allows for effortless de-molding. Will not affect concrete strength or durability.

Forms a thin film between formwork and concrete. Remains intact during the curing process, ensuring optimal performance, even in demanding conditions.

BRAND NEW PRODUCT



PART NO.	SIZE
CT-LC501-20L	20 Litres
CT-LC501-200L	200 Litres
CT-LC501-1000L	1,000 Litres (IBC)

Cost effective and versatile. Can be diluted with water for desired consistency. Easily applied using sprayers, brushes, or rollers.

Smooth release reduces the risk of defects and damage to formwork. Ensures clean and easy separation and a smooth, uniform finish. Eliminates the need for excessive patching or sanding.

Compatible with various types of formwork materials, including plywood, metal, plastic, and composite materials. Can be used for both vertical and horizontal formwork applications, such as walls, columns, beams, and slabs.

Safe and sustainable choice - environmentally friendly, non-toxic, and biodegradable.

LIQUID CHISEL LC401 RED DUST REMOVER

Fast acting acidic blend quickly removes iron ore red dust and heavy road dirt.

Advanced chemical formulation dissolves rust without mechanical action.

Results in a chemically clean surface free of corrosion.

Typically used on a wide range of structures, machinery, and heavy excavation or moving equipment. Frequently sought after in the mining and construction industries.

Great on aluminium doors and parts that can be sprayed, wiped, or immersed. Rinses away easily without streaking.

Compatible with metal, glass, rubber, plastic, and painted surfaces.

EXCELLENT FOR OFF-ROAD VEHICLES



PART NO.	SIZE
CT-LC401-20L	20 Litres
CT-LC401-200L	200 Litres



"Excellent for off-road vehicles" - Image courtesy of customer

FEATURES & FEEDBACK

- ✓ **Superior Iron Particle Removal**
"Excellent cleaning performance, and does keep corrosion away"
- ✓ **Safe & Non-Abrasive**
"Doesn't scratch, etch, or remove surface paint - or any coatings"
- ✓ **Rapid & Efficient**
"Penetrates quickly and reduces cleaning time and effort"
- ✓ **Versatile Formulation**
"Great on all exterior surfaces, as well as immersion of parts"
- ✓ **Easy Rinsing**
"Easy to spray on with a hand-held sprayer, and just as easy to hose off without any scrubbing"

LUBRICANTS

DEOX R1™ MULTI-PURPOSE LUBRICANT



✓ High quality, superior ingredients and refined mineral oils.

First time, every time lubrication for the professional tradesperson.

Penetrates quickly. Displaces water and repels moisture. Dissolves grease and cleans most metal surfaces. Reduces wear and friction.

Leaves a light surface film behind to prevent corrosion.

Effectively loosens rusted parts and stops squeaks.

Great Australian lubricant for the maintenance of tools, parts, and machinery.

PART NO.	SIZE
CT-R1-300	300g Aerosol
CT-R1-5L	5 Litres
CT-R1-20L	20 Litres
CT-R1-SPR	500ml Empty Spray Bottle



DEOX R44 SOLVENT-FREE LUBRICANT



✓ Lanolin-based with no silicone or harsh solvents

Lubricates metal surfaces. Rejuvenates stainless steel. Protects against friction and wear. Extends the life of moving or mechanical parts.

Superior corrosion protection. Rust proofs equipment and parts in storage.

Seals against moisture and water intrusion. Clings to most surfaces in wet or dry conditions.

Trusted Australian rust protection product.

**FREE OF ALL
SILICONES &
HARSH SOLVENTS**

PART NO.	SIZE
CT-R44-300	300g Aerosol
CT-R44-5L	5 Litres
CT-R44-20L	20 Litres
CT-R44-SPR	500ml Empty Spray Bottle



DEOX R56 SUPER LUBRICANT



The ultimate solution for optimising performance - even in challenging conditions. Contains advanced lubricating additives for unparalleled protection.

Quickly penetrates tight spaces, crevices, and hard to reach areas. Allows for the smooth operation of moving and rusted parts.

Beneficial where exposure to moisture, chemicals, and harsh conditions is common. Ideal for the long-term preservation of hand tools.

Stops squeaks. Contains corrosion inhibitors to extend service life.

Protects operating controls, electrical wiring, and more.

PART NO.	SIZE
CT-R56-400	400g Aerosol
CT-R56-5L	5 Litres
CT-R56-20L	20 Litres
CT-R56-SPR	500ml Empty Spray Bottle



FIND MORE GREAT AEROSOL LUBRICANTS
ONLINE AT: WWW.CHEMTOLS.COM.AU

Major Brands • Competitive Range • All Industries

DEOX R60 HEAVY DUTY SILICONE SPRAY

Water displacing, high performance light lubricant. Provides high industrial grade lubrication of gears and other moving parts and components.

Excellent corrosion resistance to extreme weather and temperature conditions, as well as salt spray deposits and some chemical assaults.

Leaves a residual friction-reducing film behind to protect from wear in non-load bearing mechanical assemblies.

Promotes a reduction of adhesion between sliding surfaces, including tracks, hinges, and conveyors.

Formulated for safe use on most rubbers, paintwork, and plastics*.

Commonly used as a mold release agent across multiple industries.

**May affect some silicone rubbers and delicate plastics. It is recommended to test surfaces first before full application.*

PART NO.	SIZE
CT-R60-300	300g Aerosol



LUBRICANTS

LANOFLEX™ R50 GENERAL PURPOSE LANOLIN



Powerful rust and corrosion preventative. Non-conductive for the protection of battery terminals and wires.

Lanolin-rich formula. Blended with Vapour Corrosion Inhibitors (VCIs) and refined mineral oil distillates. Offers high lubricity and protective properties.

Displaces water and repels moisture. Provides trouble-free long-term mechanical rust-proofing.

Lubricates and cleans most surfaces. Excellent performance on ferrous metals

Leaves a thin, waterproof film behind for enhanced salt spray protection in marine environments.

Safe for use on rubber, paintwork, and most plastics.

Restores and preserves leather, vinyl, and timber. Loosens rusted parts and stops squeaks.

PART NO.	SIZE
CT-R50-400	400g Aerosol
CT-R50-750ML	750ml Trigger Spray
CT-R50-5L	5 Litres
CT-R50-20L	20 Litres

LANOFLEX™ R55 HEAVY DUTY LANOLIN



Non-toxic multi-purpose rust preventative. Boasts a powerful formulation of refined mineral oil distillates, lanolin, and Vapour Corrosion Inhibitors (VCIs).

Lubricates, cleans, penetrates, and prevents corrosion. Firm adhesive tendency to most metal surfaces.

Dries leaving a tenacious layer of grease as a natural barrier to moisture and water.

Excellent protection from salt spray deposits. Excellent protective properties for ferrous metals.

Ideal for the long term outdoor storage of tools and equipment.

Excellent leather protector.

Seals and preserves timber.

Safe on rubber, paintwork, and most plastics.

PART NO.	SIZE
CT-R55-400	400g Aerosol
CT-R55-750ML	750ml Trigger Spray
CT-R55-5L	5 Litres
CT-R55-20L	20 Litres

DEOX R14 UNIVERSAL SILICONE PASTE



- ✓ RUBBER & O-RING LUBRICANT
- ✓ FANTASTIC DIELECTRIC GREASE

Excellent dielectric properties. Extreme high and low temperature capabilities. High drop point and remains tacky for longer.

Great water resiliency and oxidation resistance.

Shields from moisture and contaminants. Provides a rust-proof seal against environmental exposure and corrosion.

Can be used as a long term lubricant for plastics and rubbers. Reduces friction and increases the life of vacuum seals, o-rings, belts, and non metal-to-metal moving components.

Insulates spark plugs and electrical wiring.

Extends times between servicing. Results in reduced labour and maintenance costs on machinery and equipment.

PART NO.	SIZE
CT-R14-50G	50g Tube
CT-R14-1KG	1 Kilogram
CT-R14-2.5KG	2.5 Kilograms

TAP-N-COOL STRAIGHT CUTTING FLUID

Ready-to-use high performance light to medium duty oil.

- ✓ Non-flammable
- ✓ Recommended for all metal types



Formulated with specialised functional chemistry to minimise misting.

Contains solvent refined mineral oils and extreme pressure additives. Includes a non-staining biocide package to resist the formation of bacteria and fungus.

Provides an excellent surface finish with great anti-wear properties and high corrosion inhibition for a rust-free environment - essential for machine tools and finished parts.

Free flowing for rapid dissipation of heat from metal removal and forming operations.

PART NO.	SIZE
CT-SCF-250ML	250ml
CT-SCF-300	300g Aerosol
CT-SCF-500ML	500ml
CT-SCF-5L	5 Litres
CT-SCF-20L	20 Litres

PAINTS & COATINGS

SPOT IT • SURVEY MARKING PAINTS ✓ COLOUR VISIBILITY ✓ RETENTION ✓ DURABILITY

HIGHEST QUALITY MARKINGS



Left to Right: Purple, Black, Green, White, Yellow, Red, Blue, Fluro Yellow, Fluro Pink, Fluro Orange, Fluro Green, Fluro Blue

*Visibility varies with traffic and exposure

- ▶ Contains a special resin and pigment system to provide long-term durability. Formulated for high fluorescence with a high density of colour pigments in every can.
- ▶ Non-freezing formula is operational to -10°C and withstands the harshest of weather conditions. Paint is touch dry in 5 minutes providing good results when sprayed over damp grass wet with dew.
- ▶ Leaves a lasting mark for up to 6 months*. Exceptional coverage on rough or porous surfaces such as bitumen, concrete, asphalt, masonry, timber, dirt, turf, and shrubbery.
- ▶ Easy and effective to use by hand with no marking trolley or machinery required. Specially designed for inverted use with a high delivery flow valve for faster and better coverage.
- ▶ Non-clogging nozzle in combination with quality ingredients means paint will not run dry. Aerosol empties completely down to the very last drop.
- ▶ No side-splatter (or dirty fingers) - written markings are easily identifiable with little to no extensive bleeding. Ideal for roadworks, excavation, construction, pipework, surveying, and utilities marking.
- ▶ Safer ingredients for the user and the environment: contains no added lead or chlorinated solvents.
- ▶ Range includes colours noted in the Australian Standard** for universal recognition of underground infrastructure or above ground assets. These include:

PART NO.	COLOUR	SIZE
CT-SP-350BK	Black	350g Aerosol
CT-SP-350BL	Blue	350g Aerosol
CT-SP-350FB	Fluro Blue	350g Aerosol
CT-SP-350FG	Fluro Green	350g Aerosol
CT-SP-350FO	Fluro Orange	350g Aerosol
CT-SP-350FP	Fluro Pink	350g Aerosol
CT-SP-350FY	Fluro Yellow	350g Aerosol
CT-SP-350GN	Green	350g Aerosol
CT-SP-350PL	NEW! Purple	350g Aerosol
CT-SP-350R	Red	350g Aerosol
CT-SP-350WT	White	350g Aerosol
CT-SP-350Y	Yellow	350g Aerosol

**Australian Standard AS5488-2013
Classification of Subsurface Utility Information

E	Electrical	R	Recycled Water
C	Communications	F	Fire Services
W	Potable Water	G	Gas
D	Stormwater	U	Unidentified Services

MARKING USING SYMBOLS: Using the correctly coloured marking paint along with known associated symbols such as arrows and numbers will ensure the painted message is understood if the marked location is subsurface. Symbols identify widths, depths, locations and much more - particularly on excavation sites. The Australian Standard lists markings under 4 classes: ▪ QL-(A) Sighted ▪ QL-(B) Traced ▪ QL-(C) Aligned from surface features ▪ QL-(D) Any other method

PAINTS & COATINGS

GALMAX™ 90 COLD GALVANISING PAINT & WELD THROUGH PRIMER



99% zinc purity. 90% zinc in dry film.

Matte finish.

Ideally suited to touch-up welds and damaged structures or components. Protects clean steel in the same manner as hot dip galvanising, ie, by cathodic reaction.

Exceptional long-term protection against rust and corrosion.

Becomes indistinguishable to normal weathered galvanising when top-coated with with GalMax™ SG Silver 3-in-1 Galvanising Paint.

Can also be top-coated with GalMax™ NPR Coloured Galvanising Paint.



GalMax™ 90 Sprayable

PART NO.	SIZE
CT-CG-400	400g Aerosol
CT-CGS-1L	1 Litre
CT-CGS-4L	4 Litres



GalMax™ 90 Brushable

PART NO.	SIZE
CT-CGB-1L	1 Litre
CT-CGB-4L	4 Litres

MORE GREAT GALMAX™ PRODUCTS AVAILABLE
ONLINE AT: WWW.CHEMTOLS.COM.AU

GALMAX™ SG 3-IN-1 SILVER GALVANISING PAINT



Fast drying. Exceptional rust and corrosion protection.

Weathers to the same colour as hot dip galvanising.

Suits touch-up welds and damaged structures or components. Can be used extensively in the maintenance and restoration of damaged or worn galvanised metal.

TIP • Double-guarantee your corrosion protection on steel and iron structures or equipment by priming surfaces first with GalMax™ 90 Cold Galvanising Paint with 90% zinc in dry film.

PART NO.	SIZE
CT-SG-400	400g Aerosol
CT-SG-1L	1 Litre
CT-SG-4L	4 Litres
CT-SG-20L	20 Litres

GALMAX™ NPR COLOURED GALVANISING PAINT



- ✓ Radiators ✓ Industrial Mufflers
- ✓ Metal Roofs ✓ Roads & Bridges
- ✓ Fences & Pipes ✓ Offshore Rigs

TIP • For long-term and added protection on fresh welds or in coastal environments, prime the surface first with GalMax™ 90 Cold Galvanising Paint.

PART NO.	COLOUR*	SIZE
CT-BSG-400	NEW! Blue	400g Aerosol
CT-BKSG-400	Black	400g Aerosol
CT-BLSG-400	Steel Blue (renamed)	400g Aerosol
CT-CYSG-400	Caterpillar® Yellow	400g Aerosol
CT-FBSG-400	NEW! Ford Blue	400g Aerosol
CT-JDSG-400	John Deere® Green	400g Aerosol
CT-GSG-400	Green	400g Aerosol
CT-KOSG-400	NEW! Kubota® Orange	400g Aerosol
CT-MBKSG-400	Matte Black	400g Aerosol
CT-MFRSG-400	Massey Ferguson Red	400g Aerosol
CT-MWSG-400	Matte White	400g Aerosol
CT-OSG-400	Orange	400g Aerosol
CT-RSG-400	Red	400g Aerosol
CT-WSG-400	White	400g Aerosol
CT-YSG-400	Safety Yellow	400g Aerosol

*All colours have a semi-gloss finish unless otherwise noted



Left to

Right: Red (RSG), Massey Ferguson Red (MFRSG), Safety Yellow (YSG), Caterpillar® Yellow (CYSG), Black (BKSG), Matte Black (MBKSG), NEW! Kubota® Orange (KOSG), Orange (OSG), John Deere® Green (JDSG), Green (GSG), White (WSG), Matte White (MWSG), NEW! Blue (BSG), NEW! Ford Blue (FBSG), Steel Blue (BLSG - Note: Originally called 'Blue', now renamed for clarity)

Please Note: Cap is approximate colour only

NOW IN 15 COLOURS!

Direct to metal corrosion protection.

Dries to a smooth and durable rust-fighting finish.

Protects steel and iron structures or equipment from corrosion. Use extensively in the maintenance and restoration of damaged or worn galvanised metal.

Excellent adhesion to most metal surfaces. Can also be used on concrete and ceramics. Great for use on marine and offshore rigs.

PAINTS & COATINGS

GALMAX™ ETCH - GREY/BLACK ETCH PRIMER



Reliably tough chromate-free self-etch formulation.

Durable anti-corrosive base coat.

Dries quickly. Perfect for spot repairs and refinishing.

Excellent adhesion for additional top coats, primers, and sealers.

Offers maximum corrosion resistance on iron and steel when exposed to water and mild chemicals.

Compatible with fibreglass and most metals, including aluminium.

Suits structural steelwork, sheets and plates, cranes, and storage tanks.

PART NO.	COLOUR	SIZE
CT-EPGY-400	Grey	400g Aerosol
CT-EPGY-4L	Grey	4 Litres
CT-EPBK-400	Black	400g Aerosol
CT-EPBK-4L	Black	4 Litres

GALMAX™ ZPH - GREY/RED OXIDE METAL PRIMER



Oil-based, long lasting rust resistant zinc phosphate primer.

Tough, durable, smooth base coat.

Ideal for non-galvanised ferrous metals. Can be applied directly over rusty surfaces. Contains corrosion resistant pigments.

Protects from chemical fumes and extreme conditions.

Quick drying.

Can be overcoated with all conventional top coats.

PART NO.	COLOUR	SIZE
CT-GYP-400	Grey	400g Aerosol
CT-GYP-1L	Grey	1 Litre
CT-GYP-4L	Grey	4 Litres
CT-GYP-20L	Grey	20 Litres
CT-ROP-400	Red	400g Aerosol
CT-ROP-1L	Red	1 Litre
CT-ROP-4L	Red	4 Litres
CT-ROP-20L	Red	20 Litres

HAND CLEANERS

PART NO.	SIZE
CT-HC-500ML	500ml Squeeze Bottle
CT-HC-5L	5 Litre Hand Pump
CT-HC-20L	20 Litre Drum

KLEANITIZE CITRA-GRIT & MINT-GRIT HAND CLEANERS

Premium, solvent-free industrial strength heavy duty hand wash.

Removes the toughest soils, including grease.

Contains ultra-fine exfoliating particles to soften hard working hands.

Active chelating ingredient binds with common heavy metals, allowing them to be washed away with water.

Neutralises strong workshop odours. Kills a broad array of bacterial germs.

Does not sting or burn cuts, scrapes, and open wounds.

Will not scratch or irritate sensitive skin.

Leaves skin feeling smooth and smelling pleasant.

Highly recommended for all workshops and manufacturing facilities.

PART NO.	SIZE
CT-MHC-500ML	500ml Squeeze Bottle
CT-MHC-5L	5 Litre Hand Pump
CT-MHC-20L	20 Litre Drum



Pleasant Citrus Aroma



Light Spearmint Aroma

SURFACE CLEANERS

INDUSTRIAL CLEANER & DEGREASER



- ✓ Solvent-free
- ✓ Non-toxic
- ✓ Biodegradable

✓ NON-FLAMMABLE FORMULA

Ready-to-use highly effective heavy duty cleaner. Suitable and safe for any surface.

For tough cleaning jobs. Provides a fast-acting, thorough clean with very little effort involved.

Superior all-purpose degreasing for most workshop, machinery, and domestic applications.

Ideal for concrete and asphalt floors, tools, benches, and heavy equipment.

Removes most greases, petroleum oils, fatty oils, tar, carbon, diesel, and organic soils with ease.

Can be sprayed, wiped, or hosed on. Works extremely well as an immersion cleaner.

Also available as a concentrate:

PART NO.	SIZE
CT-ICL-5L	5 Litres
CT-ICL-20L	20 Litres

INDUSTRIAL CLEANER & DEGREASER - CONCENTRATE

- ✓ Same great industrial cleaner, but in concentrated form



Dilute 1:1
Heavy industrial deposits

Dilute 1:10
Hard floors, medium grease/oil

Dilute 1:50
Windows, tiles, light soils

Note: Dilute to the strength required to suit the severity of the clean.

PART NO.	SIZE
CT-ICLC-5L	5 Litres
CT-ICLC-20L	20 Litres

DEOX R22 'CITRASHIFT' INDUSTRIAL CLEANER & DEGREASER

Instantly emulsifies oils, greases, and fats. Contains no harsh acids, alkalis, or petroleum solvents.

Ideal for concrete and workshop floors, and motorised tools and equipment.

Water soluble, streak-free and free rinsing.



- ✓ Great on electrical components & heavy machinery

✓ CITRUS-BASED FORMULA

Removes adhesives, resins, printing inks, decals, rubber solvents, and much more

- ✓ Extremely strong citrus fragrance to deodorise effectively

PART NO.	SIZE
CT-R22-300	300g Aerosol
CT-R22-750ML	750ml Trigger Spray
CT-R22-5L	5 Litres
CT-R22-20L	20 Litres

GROUND ZERO ANTI-STATIC GLASS & SURFACE CLEANER



- ✓ Painted/Coated Surfaces
- ✓ Most Plastics
- ✓ Chrome Appliances
- ✓ Tiles
- ✓ Vinyls
- ✓ Stainless Steel
- ✓ Mirrors
- ✓ Ceramics
- ✓ Hand Rails

Ammonia-free, water-based, non-abrasive multi-application cleaner.

Sanitises and removes tough dirt, dust, grease, lint, oil, toner, carbon, fingerprints, and smudges from multiple surfaces.

High strength, but contains no harsh chemicals.

Safe on tinted films - even in the car.

Great for cleaning computer screens and mobile devices, sensitive electronics, electrical equipment, and plastic enclosures.

- Tabletops
- Glass, Mirrors & Windshields
- Screens, Flyscreens & Blinds
- Chrome & Stainless Steel
- Aluminium Fittings & Fixtures
- Kitchen & Bathroom Tiles
- Benches & Splashbacks
- Computers, Phones & TVs
- Speakers & Stereo Plastics
- X-Ray & Optical Devices

PART NO.	SIZE
CT-GE-500	500g Aerosol
CT-GE-750ML	750ml Trigger Spray
CT-GE-5L	5 Litres
CT-GE-20L	20 Litres

BUILDING & CONSTRUCTION

**2023 - 2024
CATALOGUE**



AUSTRALIA PH: 1300 738 250

NEW ZEALAND PH: +64 3 323 4177 • SINGAPORE PH: +65 6 363 2643

YOUR LOCAL SALES REPRESENTATIVE IS:

**AUSTRALIAN MANUFACTURING FACILITY:
UNIT 2, 14 - 16 LEE HOLM ROAD ST MARYS NSW 2760 AUSTRALIA**

V2-2024.02.07

CHEMTOOLS.COM.AU • CHEMTOOLS.CO.NZ